


## D A T A S H E E T

# VDV (HV) Series

## VDV(HV)30, VDV(HV)40

High voltage input DC/DC converters

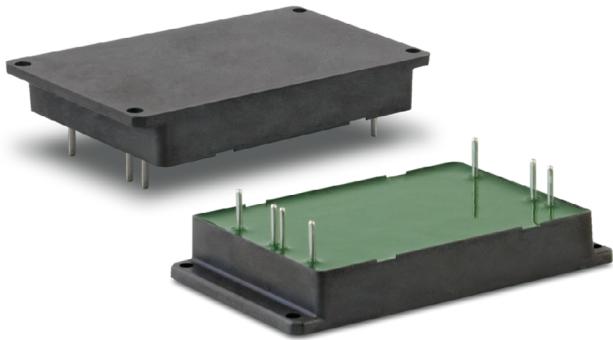

### Description

**Compact isolated DC/DC converters of VDV(HV) Series** for industrial and special purpose applications. Despite the small size (84,5×52,7×12,85 mm) the maximum output power of modules reach up 40 W and they are able to operate in a wide case operating temperature range (-60...+125°C). These modules have functions of remote on/off, remote feedback, short circuit, overcurrent and thermal protection. Without optocouplers in the converter's circuit it can safely operate in conditions of ionizing radiation and high temperature. Units have variable protections from different factors: vibration, dirt, moisture fog and salt fog. These modules undergo special thermal and limit test including burn-in test with extreme on/off modes.

### Features

- 5 year warranty
- Output current up to 8 A
- 270 VDC (index "M") input compliant with MIL-STD-704F
- Low-profile design (12,85 mm) with cylindrical pin outs
- Case operating temperature -60...+125°C
- 125 °C baseplate operation without derating
- Magnetic feedback without optocouplers
- Short circuit protection, overvoltage, thermal protection
- Single and dual output models
- Remote on/off
- Output voltage adjustment in single channel models
- Typical efficiency 86% (Uout.=24 VDC)
- Polymer potting sealing

### Engineered in accordance with

- MIL-STD-810G
- MIL-STD-461F (CE102)
- MIL-STD-704F



Description of VDV(HV) Series on the manufacturer's website  
<https://voltbricks.com/product/vdvh>

### Order registration

+65 6950 0011, Global Operations Team


### Technical support

[support@voltbricks.com](mailto:support@voltbricks.com)

### Reliability test

[https://support.voltbricks.com/Reliability-Test\\_ENG.pdf](https://support.voltbricks.com/Reliability-Test_ENG.pdf)

## Ordering information

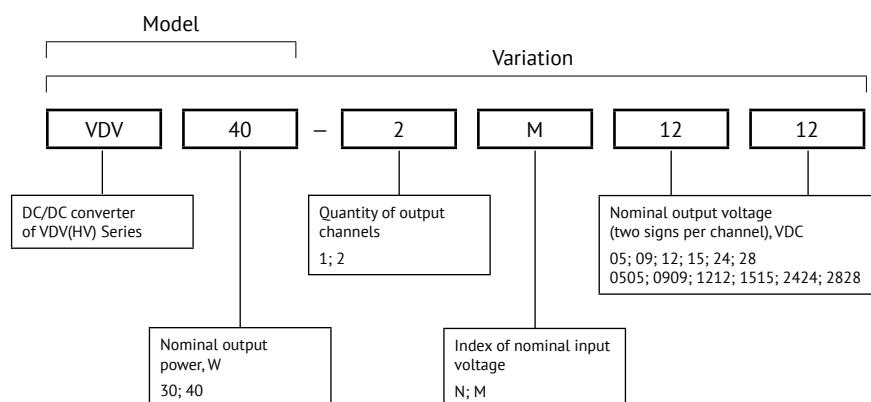

For more information please contact our Global Operations Team

+65 6950 0011

[info@voltbricks.com](mailto:info@voltbricks.com)

### Output power and current

Output power, W	30						40					
Output voltage, VDC	5	9	12	15	24	28	5	9	12	15	24	28
Maximal output current, A	6	3,33	2,5	2	1,25	1,07	8	4,44	3,33	2,67	1,67	1,42

Other output voltage within range 3...70 VDC is also available upon special request.

### Index of nominal input voltage\*

Parameter	Index "N"	Index "M"
Nominal input voltage, VDC	110	230
Input voltage range, VDC	82...154	175...350
Transient deviation (1 s), VDC	82...170	175...400
Typical efficiency for Uout.=24 VDC	86%	86%

\* Reflected input ripple current (10–10000 Hz) – 8% Uin. nom

## Specifications

All specifications valid for normal climatic conditions (ambient temp. 15...35°C; relative humidity 45...80%; air pressure 8,6\*10<sup>4</sup>...10,6\*10<sup>4</sup> Pa), Uin. nom, Iout. nom, unless otherwise stated. It is important to note that the information herein is not full.

### Output specifications

Parameter	Value	
Output voltage adjustment of single channel models		±5% Uout. nom
Regulation	Input voltage variation (Umin...Umax)	±2% Uout. nom (for the 1st output channel) ±7% Uout. nom (for the 2nd output channel)
	Load variation (10...100% Imax)	±12% Uout. nom (for the 2nd output channel) for dual-channel version with voltage difference between channels ≥20%
	Total regulation	±6% Uout. nom (for the 1st output channel) ±10% Uout. nom (for the 2nd output channel) ±14% Uout. nom (for the 2nd output channel) for dual-channel version with voltage difference between channels ≥20%
Ripple and noise (p-p)		<2% Uout. nom
Maximum capacitive load	5 VDC 12 VDC 24 VDC 48 VDC	2700 uF 250 uF 55 uF 27 uF
Start up time (remote)		max 0,1 s
Overload protection level*	30 W 40 W	<3 Pmax <2,2 Pmax
Short circuit protection*		hiccup auto recovery
Overvoltage protection		1,5 Unom
Transient response deviation		see fig. 8 (d)

\* Parameters are stated for the information purposes and could not be used at long term work, exceeding maximum output current, at work outside of a range of operating temperatures.

### General specifications

Parameter	Value	
Case temperature	Operating	-60...+125°C
	Storage	-60...+125°C
Switching frequency		130 kHz ±10%
Isolation capacitance	input/output	1500 pF
Isolation voltage (60 s)	input/output input/case output/case	1500 VAC, 50 Hz 1500 VAC, 50 Hz 500 VAC, 50 Hz
Isolation resistance @ 500 VDC	input/output	20 MΩ min, normal climatic conditions
Thermal impedance	5,3°C/W	
Thermal protection level	118...125°C, clamp, auto recovery	
Remote on/off	Off: connection of pins "ON" and "-IN", I≤5 mA	
Vibration and dust proof, salt fog resistant	+	
Moisture proof (Tamb.=25°C)	98%	
Typical MTBF	1737900 hrs	
Failure rate	<0,05%	
Warranty	5 years	

## Specifications (cont.)

### Physical specifications

Parameter	Value
Case material	aluminium
Potting	epoxy polymer
Pin material	phosphor bronze, SnPb plated
Weight	max 110 g
Soldering temperature	260°C @ 5 s

## Design topology

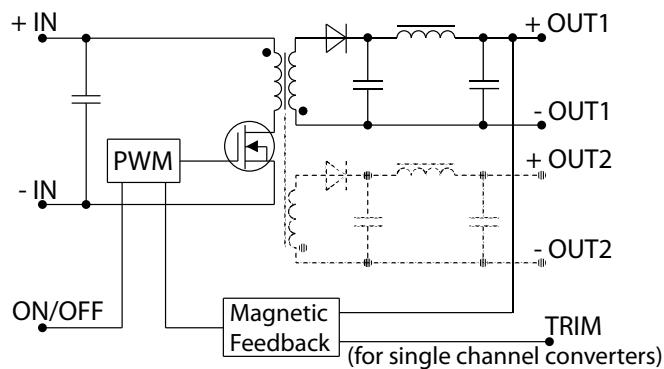


Figure 1. Design topology.

## Service functions

### Typical connection

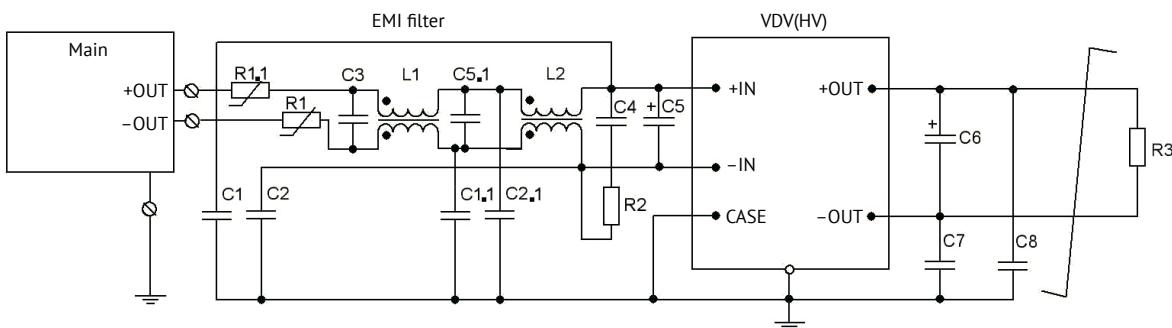


Figure 2. Typical connection with filtration unit.

R2	resistor	1 Ohm		
R1, R1.1	NTC-thermistor	4,7 Ohm		
C1, C2	ceramic capacitor	4700 pF 500 VDC min		
C1.1, C2.1	tantalum capacitor	0...2200 pF		
C7, C8	tantalum capacitor	2200...4700 pF		
C4	film capacitor	Input voltage	0,01...0,15 uF	
C5	film capacitor*	0,22...0,47 uF		
	electrolytic capacitor	Input voltage	110 VDC 230 VDC	15...33 uF 3,3...6,8 uF
C6	tantalum capacitor	Output voltage		
L1	common mode choke	0,4...2 mH		
L2	common mode choke	5...20 mH		
C3 C5.1	film capacitor	Input voltage	110 VDC 230 VDC	0,22...0,47 uF

\* C4 is recommended to be installed in addition to C5 (electrolytic).

## Service functions (cont.)

### Remote control

Function of remote control by a signal allows to control the unit's operation using mechanical relay or electric switch of "open collector" type.

The unit should be powered off by connecting "ON" output to "-IN" output. The switch can carry current of up to 5 mA, the max voltage drop on the switch should be less than 1,1 V.

The unit is powered on by disconnecting the switch within the time less then 5  $\mu$ s. Being disconnected the switch is applied by approximately 5 V, allowable current leakage through the switch should not be over 50  $\mu$ A.

To arrange remote power off/on of several units simultaneously it is not allowed to use additional elements in the circuit to connect outputs "ON" and "-IN" and a switch.

If the function of remote power off/on is not used, "ON" output is allowed to be left unconnected.

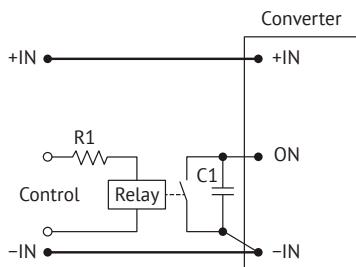


Figure 3 (a). ON/OFF control by relay.

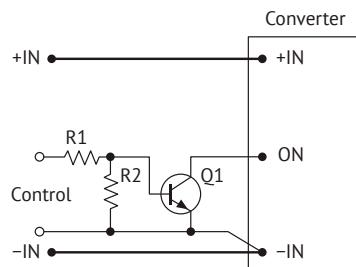


Figure 3 (b). ON/OFF control by bipolar transistor.

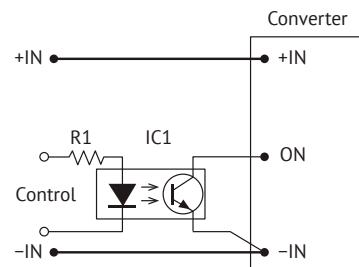


Figure 3 (c). ON/OFF control by optocoupler.

### Adjustment

Adjustment of output voltage of a power supply unit within the range of at least  $\pm 5\%$  can be done by connecting "ADJ" output (if available) through "-OUT" output to increase output voltage, or through "+OUT" output to decrease the output voltage.

In case of using variable resistor Rvar and outside resistors (R1, R2) it is possible to fulfill the adjustment both to increase and decrease the output voltage.

If you need to control the output voltage of a power supply unit by a signal from external source of current or voltage, e.g. in micro-controller automated control systems using DAC, the external current or voltage signal should be supplied to the adjustment output relating to "-OUT" output, as shown in the drawings (e) and (d).




Figure 4 (a). Output voltage increase.




Figure 4 (b). Output voltage decrease.




Figure 4 (c). Adjustment by resistive divider.




Figure 4 (d). Adjustment by current source.




Figure 4 (e). Adjustment by voltage source.

## Efficiency

### VS load

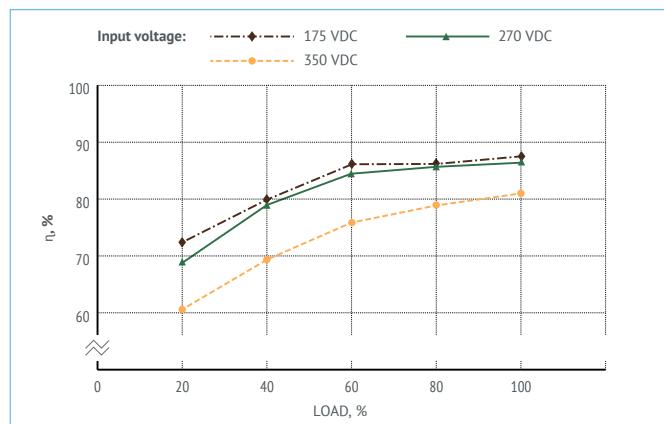


Figure 5. Efficiency of VDV(HV)40-1M28.

## Oscillograph charts

Testing conditions Uin.=270 VDC, Iout.=8 A, Tamb.=25 °C, Uout.=5 VDC, Cout.=100  $\mu$ F

The database of regulated parameters of the manufactured products is available. Pls. contact your personal manager or customer support service to get necessary information.



Figure 6 (a). Oscillograph chart of setting output voltage after supplying remote control signal to ON-output.

Ray 1 (red) – output voltage. Scale 2 V/div.

Ray 2 (blue) – voltage at ON-output. Scale 2 V/div.

Time scale t=5 ms/div.

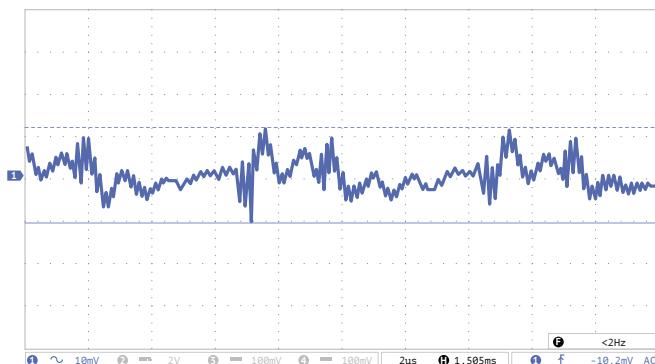


Figure 6 (b). Oscillograph chart of output voltage after supplying the input voltage.

Ray 1 (blue) – input voltage. Scale 100 V/div.

Ray 2 (red) – output voltage. Scale 5 V/div.

Time scale t=50 ms/div.



**Figure 6 (c).** Oscilograph chart of output voltage ripple.

Ray 1 (blue) – ripple of output voltage. Scale 10 mV/div.

Time scale 2 us/div.

Measuring technique: see Electrical Test Screen.



**Figure 6 (d).** Oscilograph chart of voltage transient deviation during load “drop/rise”.

Ray 1 (blue) – output voltage. Scale 200 mV/div.


Time scale t=5 ms/div.

Modes:

- “drop” output current variation (10...100%)  $I_{nom}$ ;
- “rise” output current variation (10...100%)  $I_{nom}$ ;
- build-up time 500  $\mu$ s.

## Noise spectrogram

Testing according to MIL-STD-461F CE102. ( $T_{case}=25^{\circ}\text{C}$ ,  $V_{in}=+12\text{ V}$ , full load, unless otherwise specified)

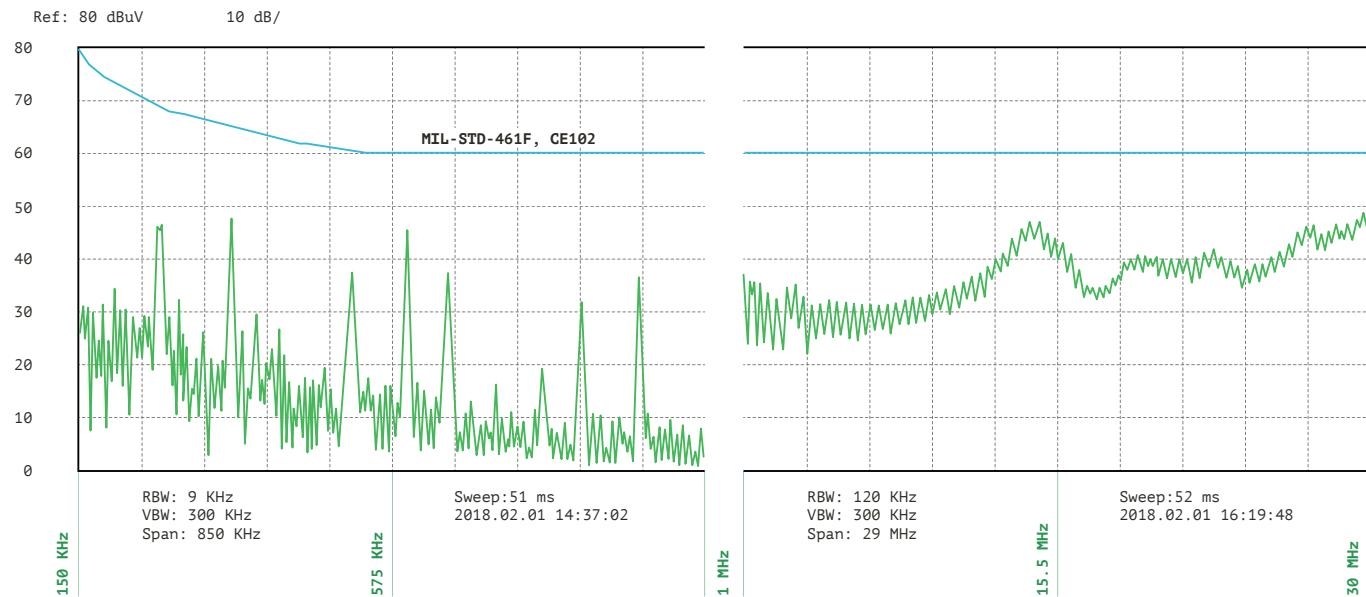

**Figure 7.** Spectrogram of VDV(HV)40-1M05 with typical connection diagram.

## Outline dimensions

### Models packed in reinforced case with flanges

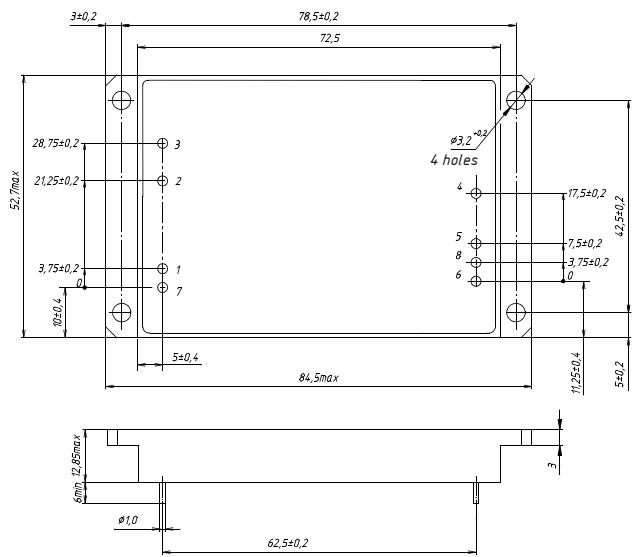


Figure 8 (a). Single-output models.

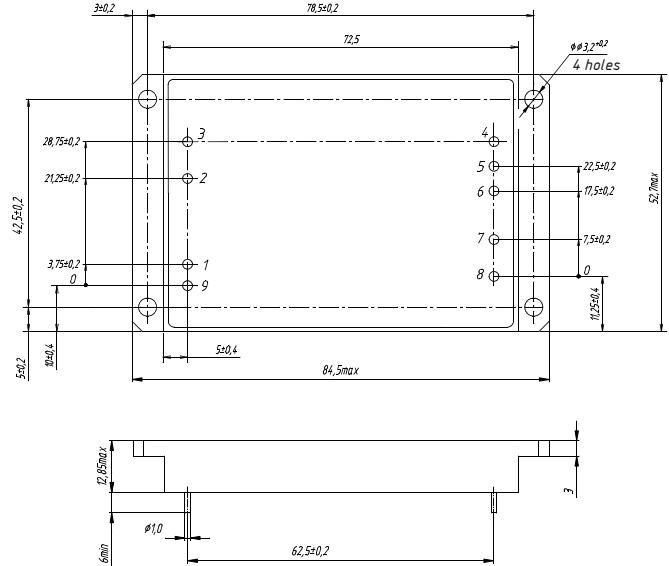


Figure 8 (b). Dual-output models.

### Pin out

Pin #	1	2	3	4	5	6	7	8	9
Single channel	+IN	-IN	ON	+OUT	-OUT	CASE	CASE	TRIM	-
Dual channel	+IN	-IN	ON	+OUT1	-OUT1	+OUT2	-OUT2	CASE	CASE

## Heatsink

Part number	Ribs configuration	Dimensions A×B×H×D, mm	Area, cm <sup>2</sup>	Weight, g
752695.006	Longitudinal	84,5×52×14×4	218	90
752695.006-01	Longitudinal	84,5×52×24×4	383	135

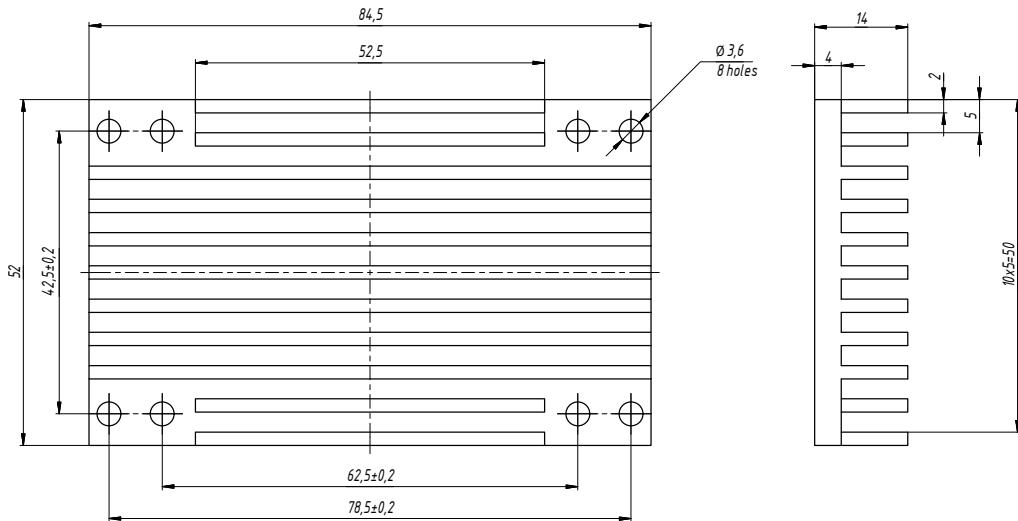


Figure 9 (a). 752695.006.

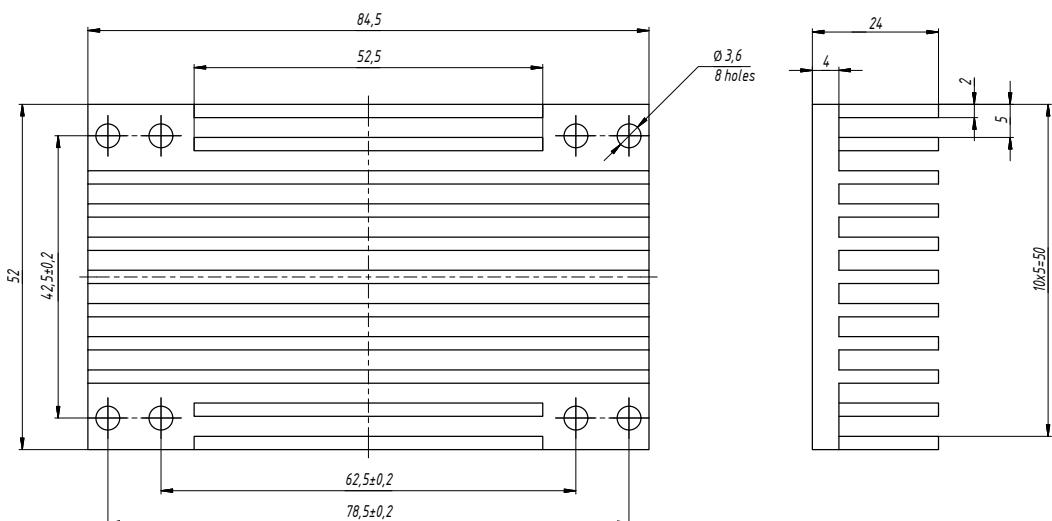


Figure 9 (b). 752695.006-01.

# voltbricks

[www.voltbricks.com](http://www.voltbricks.com) [info@voltbricks.com](mailto:info@voltbricks.com)

VOLTBRICKS PTE. LTD.

105 Cecil street  
#15-01 The OCTAGONE  
Singapore 069534  
+65 6950 0011

Manufacturer of reliable DC/DC converters and power supply systems

**This datasheet is valid for the following units:** VDV30-1N05; VDV30-1N09; VDV30-1N12; VDV30-1N15; VDV30-1N24; VDV30-1M05; VDV30-1M09; VDV30-1M12; VDV30-1M15; VDV30-1M24; VDV30-1M28; VDV40-1N05; VDV40-1N09; VDV40-1N12; VDV40-1N15; VDV40-1N24; VDV40-1N28; VDV40-1M05; VDV40-1M09; VDV40-1M12; VDV40-1M15; VDV40-1M24; VDV40-1M28; VDV30-2N0505; VDV30-2N0909; VDV30-2N1212; VDV30-2N1515; VDV30-2N2424; VDV30-2N2828; VDV30-2M0505; VDV30-2M0909; VDV30-2M12; VDV30-2M1515; VDV30-2M2424; VDV30-2M2828; VDV40-2N0505; VDV40-2N0909; VDV40-2N1212; VDV40-2N1515; VDV40-2N2424; VDV40-2N2828; VDV40-2M0505; VDV40-2M0909; VDV40-2M1212; VDV40-2M1515; VDV40-2M2424; VDV40-2M2828.