

voltbricks

DATASHEET

VDV Series

VDV1000

Multi-purpose compact DC/DC converters



Description

Compact isolated DC/DC converters of VDV Series for industrial and special purpose applications. Despite the small size (168×122×16 mm) the maximum output power of modules reach up to 1000 W and they are able to operate in a wide case operating temperature range (–60...+125°C). These modules might have single galvanically isolated output, remote on/off, short circuit, overcurrent and thermal protection and can operate in parallel and series modes. Without optocouplers in the converter's circuit it can safely operate in conditions of ionizing radiation and high temperature. Power supplies have variable protections from different factors: vibration, dirt, moisture fog and salt fog.

These modules undergo special thermal and limit test including burn-in test with extreme on/off modes.

Compliance

- MIL-STD-810G
- MIL-STD-461F (CE102)
- MIL-STD-704E



Description of VDV Series on the manufacturer's website
<https://voltbricks.com/product/vdv>

Features

- 5 year warranty
- Output current up to 40 A
- 28 VDC (index "V") input compliant with MIL-STD-704E
- Low-profile design (16 mm) with cylindrical pin outs
- Case operating temperature –60...+125°C
- 125 °C baseplate operation without derating
- Magnetic feedback without optocouplers
- Short circuit protection, overvoltage, thermal protection
- Remote on/off
- Output voltage adjustment
- Typical efficiency 89% (U_{out}=24 VDC)
- Polymer potting sealing

Order registration

+65 6950 0011, Global Operations Team

Technical support

support@voltbricks.com


Reliability test

https://support.voltbricks.com/Reliability-Test_ENG.pdf

3D models

<https://support.voltbricks.com/models/VDV1000-en.stp>

Ordering information

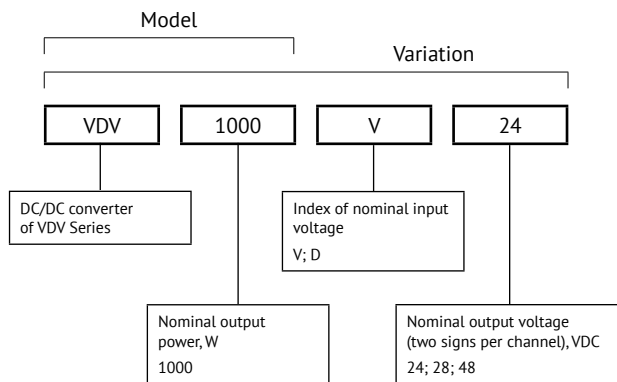

For more information please contact our Global Operations Team

+65 6950 0011

info@voltbricks.com

Output power and current

| Model | VDV1000 | | |
|---------------------------|---------|------|------|
| Output power, W | 960 | 1000 | |
| Output voltage, VDC | 24 | 28 | 48 |
| Maximal output current, A | 40 | 35,7 | 20,8 |

Index of nominal input voltage*

| Parameter | Index "V" | Index "D" |
|-------------------------------------|-----------|-----------|
| Nominal input voltage, VDC | 28 | 48 |
| Input voltage range, VDC | 17...36 | 36...75 |
| Transient deviation (1 s), VDC | 17...80 | 36...84 |
| Typical efficiency for Uout.=24 VDC | 88% | 89% |

* Reflected input ripple current (10–10000 Hz) – 8% Uin. nom

Specifications

All specifications valid for normal climatic conditions (ambient temp. 15...35°C; relative humidity 45...80%; air pressure 8,6*10⁴...10,6*10⁴ Pa), U_{in}. nom, I_{out}. nom, unless otherwise stated. It is important to note that the information herein is not full.

Output specifications

| Parameter | | Value |
|--|---|--------------------------------|
| Output voltage adjustment of single channel models | | ±5% U _{out} . nom |
| Regulation | Input voltage variation (U _{min} ...U _{max}) | max ±2% U _{out} . nom |
| | Load variation (10...100% I _{max}) | |
| | Total regulation | ±6% U _{out} . nom |
| Ripple and noise (p-p) | | <2% U _{out} . nom |
| Maximum capacitive load | 24 VDC | 470 uF |
| | 48 VDC | 220 uF |
| Start up time (remote) | | max 0,1 s |
| Overload protection level* | | <1,8 P _{max} |
| Short circuit protection* | | hiccup auto recovery |
| Overvoltage protection | | 1,5 U _{nom} |

* Parameters are stated for the information purposes and could not be used at long term work, exceeding maximum output current, at work outside of a range of operating temperatures.

General specifications

| Parameter | | Value |
|--|---|--|
| Case temperature | Operating (natural convection) – power derating (natural convection) – without power derating with heatsink | –60...+125°C see power derating diagram (dashed, dash-dotted curve) see power derating diagram (solid curve) |
| | Storage | –60...+125°C |
| Switching frequency | | 280 kHz ±10% |
| Isolation capacitance | input/output | 1500 pF |
| Isolation voltage (60 s) | input/output, input/case, output/case | 500 VAC, 50 Hz |
| Isolation resistance @ 500 VDC | input/output, input/case, output/case | 20 MOhm min, normal climatic conditions |
| Thermal impedance | | 2,7°C/W |
| Thermal protection level | | 118...125°C, clamp, auto recovery |
| Remote on/off | | Off.: connection of pins "ON" and "–IN", I _s ≤ 5 mA |
| Vibration and dust proof, salt fog resistant | | + |
| Moisture proof (T _{amb} =25°C) | | 98% |
| Typical MTBF | | 1 737 900 hrs |
| Failure rate | | <0,05% |
| Warranty | | 5 years |

Specifications (cont.)

Physical specifications

| Parameter | Value |
|-----------------------|------------------------------|
| Case material | aluminium |
| Potting | epoxy polimer |
| Pin material | phosphor bronze, SnPb plated |
| Weight | max 690 g |
| Soldering temperature | 260°C @ 5 s |

Design topology

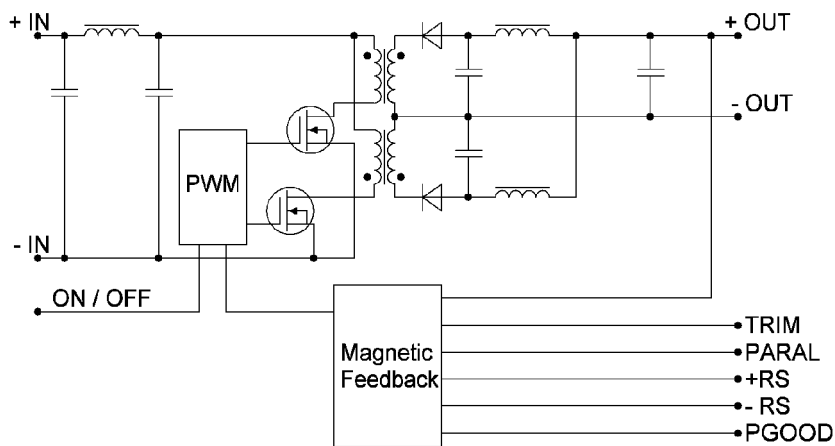


Figure 1. Design topology.

Service functions

Typical connection

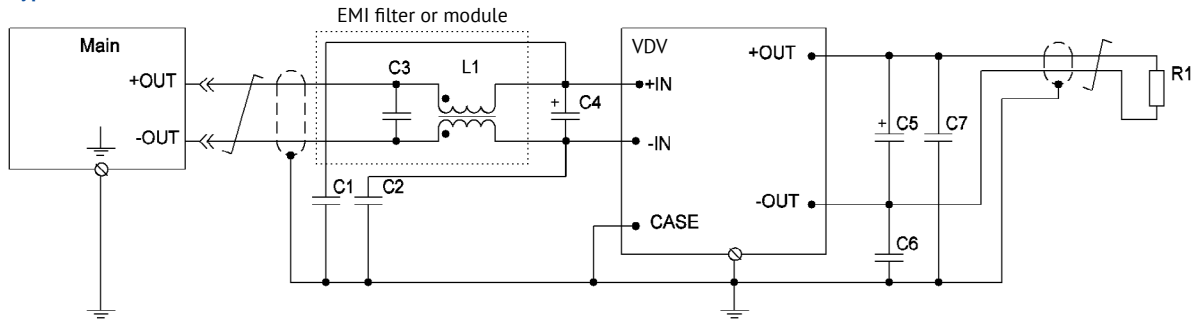


Figure 2. Typical connection with filtration unit.

| | | | | | |
|----------------|----------|--|----------------|----------------------------|--|
| C1, C2, C6, C7 | | ceramic capacitor | | 100...4700 pF 500 VDC min | |
| C4 | | tantalum capacitor | Input voltage | 28 VDC 48 VDC | 470...1000 uF 50 V 100...220 uF 100 V |
| C5 | | tantalum capacitor | Output voltage | 24 VDC 28 VDC 48 VDC | 100 uF 47 uF 47 uF |
| EMI Filter | L1 | common mode choke | | | 0,7 mH |
| | C3 | ceramic capacitor | Input voltage | 28 VDC 48 VDC | 470...1000 uF 100...220 uF |
| EMI Module | M series | Double Pi filter EMI module. See datasheet M Series | | | Maximum current up to 20 A, overvoltage and surge protection, loss insertion up to 60 db |

Service functions (cont.)

Remote control

Function of remote control by a signal allows to control the unit's operation using mechanical relay or electric switch of "open collector" type.

The unit should be powered off by connecting "ON" output to "-IN" output. The switch can carry current of up to 5 mA, the max voltage drop on the switch should be less than 1,1 V.

The unit is powered on by disconnecting the switch within the time less then 5 μ s. Being disconnected the switch is applied by approximately 5 V, allowable current leakage through the switch should not be over 50 μ A.

To arrange remote power off/on of several units simultaneously it is not allowed to use additional elements in the circuit to connect outputs "ON" and "-IN" and a switch.

If the function of remote power off/on is not used, "ON" output is allowed to be left unconnected.

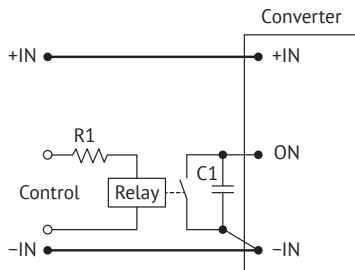


Figure 3 (a). ON/OFF control by relay.

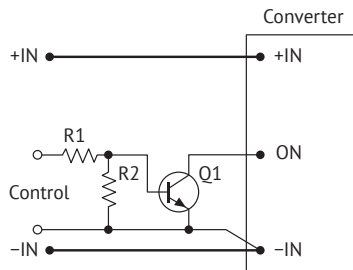


Figure 3 (b). ON/OFF control by bipolar transistor.

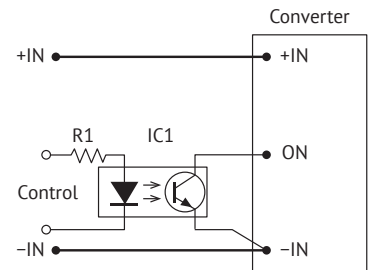


Figure 3 (c). ON/OFF control by optocoupler.

Adjustment

Adjustment of output voltage of a power supply unit within the range of at least $\pm 5\%$ can be done by connecting "ADJ" output (if available) through "-OUT" output to increase output voltage, or through "+OUT" output to decrease the output voltage.

In case of using variable resistor Rvar and outside resistors (R1, R2) it is possible to fulfill the adjustment both to increase and decrease the output voltage.

If you need to control the output voltage of a power supply unit by a signal from external source of current or voltage, e.g. in micro-controller automated control systems using DAC, the external current or voltage signal should be supplied to the adjustment output relating to "-OUT" output, as shown in the drawings (e) and (d).




Figure 4 (a). Output voltage increase.




Figure 4 (b). Output voltage decrease.




Figure 4 (c). Adjustment by resistive divider.




Figure 4 (e). Adjustment by current source.




Figure 4 (d). Adjustment by voltage source.

Efficiency

VS load

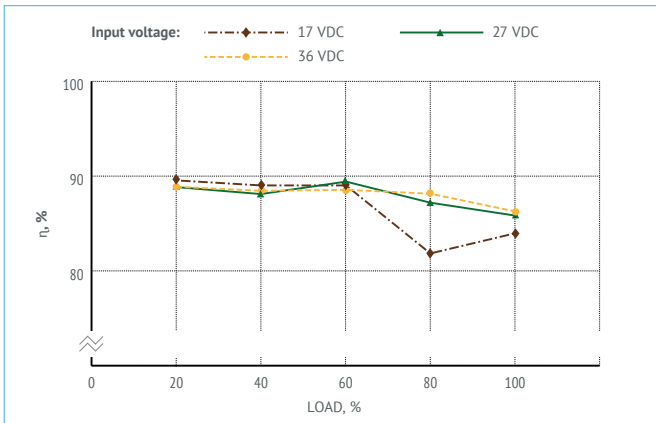


Figure 5. Efficiency of VDV1000-1V28.

Power derating

VS ambient temperature and baseplate temperature

The PSU is able to operate with 100% load within the complete range of case operating temperature (−60...+125 °C). On condition the case temperature is kept from −60 °C to 125 °C the PSU will operate without derating regardless of the ambient temperature. Thermal Management section of the Application Notes shows the resulting heatsink area, as well as baseplate-vs-ambient thermal resistance, the min thickness of the heatsink, and the max PSU output power without heatsink.

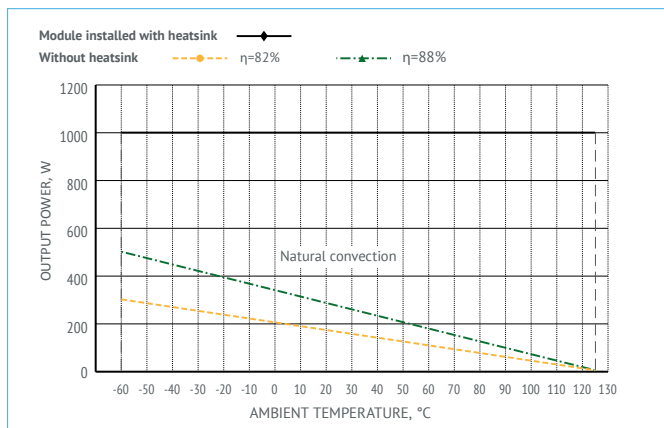


Figure 6. Power derating of VDV1000-xxx.

Oscillograph charts of VDV1000-xxx

Testing conditions $U_{in}=28$ VDC, $I_{out}=30$ A, $T_{amb}=25^{\circ}\text{C}$, $U_{out}=24$ VDC, $C_{out}=100$ μF

The database of regulated parameters of the manufactured products is available. Pls. contact your personal manager or customer support service to get necessary information.

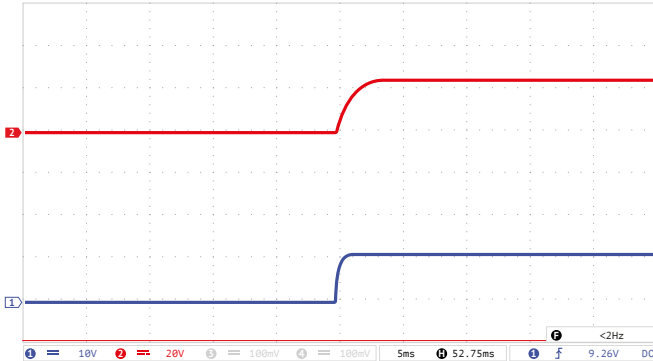


Figure 7 (a). Oscillograph chart of setting output voltage after supplying remote control signal to ON-output.

Ray 1 (blue) – voltage at ON-output. Scale 10 V/div.

Ray 2 (red) – output voltage. Scale 20 V/div.

Time scale $t=5$ ms/div.

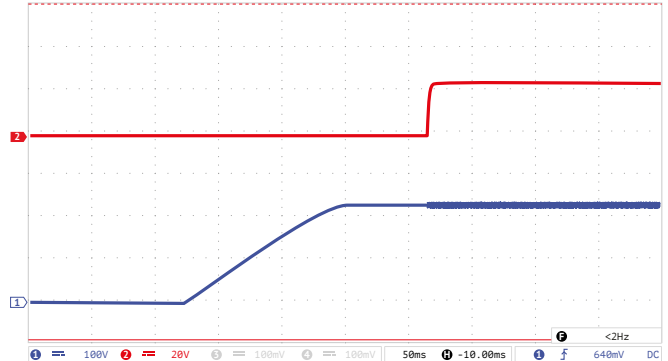


Figure 7 (b). Oscillograph chart of output voltage after supplying the input voltage.

Ray 1 (blue) – input voltage. Scale 100 V/div.

Ray 2 (red) – output voltage. Scale 20 V/div.

Time scale $t=50$ ms/div.

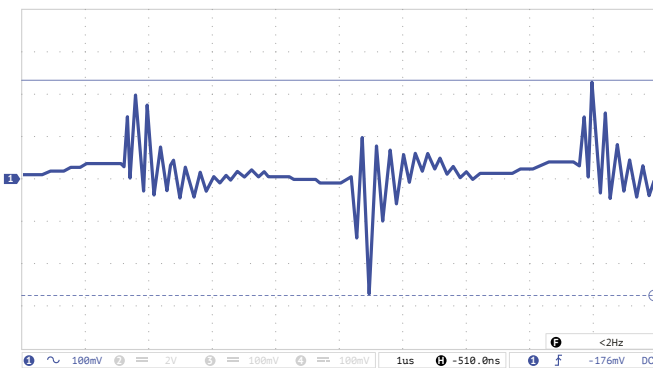


Figure 7 (c). Oscillograph chart of output voltage ripple.

Ray 1 (blue) – ripple of output voltage. Scale 100 mV/div.

Time scale 1 μs /div.

Measuring technique: see Electrical Test Screen.

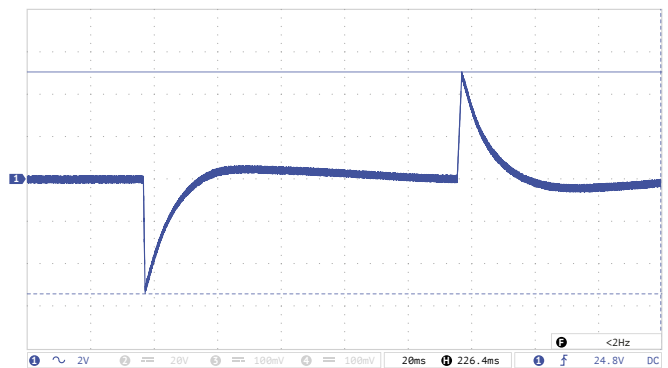


Figure 7 (d). Oscilloscope chart of voltage transient deviation during load "drop/rise".

Ray 1 (blue) – output voltage. Scale 2 V/div.

Time scale $t=20$ ms/div.

Modes:

- "drop" output current variation (10...100%) I_{nom} ;
- "rise" output current variation (10...100%) I_{nom} ;
- build-up time 500 μs .

Outline dimensions

Models packed in reinforced case with flanges

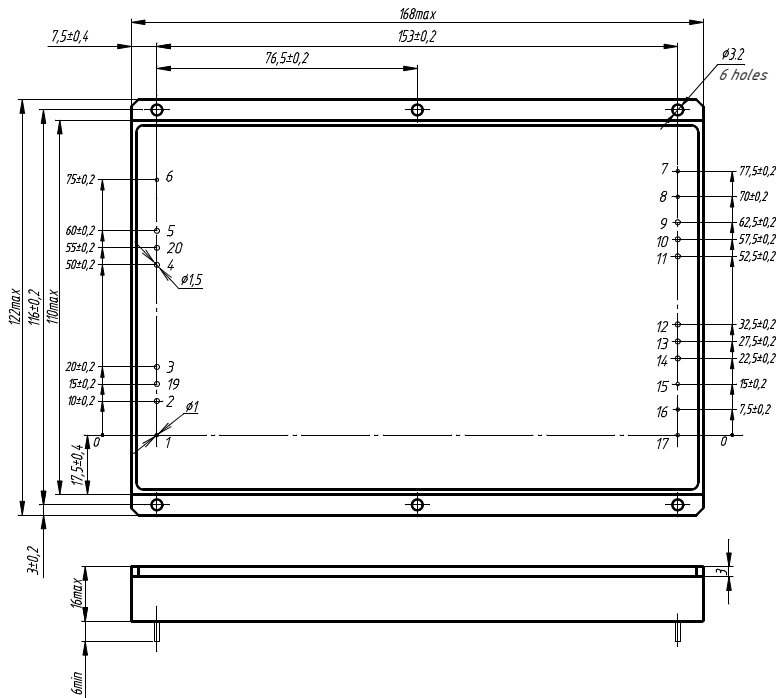


Figure 8. Single-output models.

Pin out

| Pin # | 1 | 2, 3, 19 | 4, 5, 20 | 6 | 7 | 8 | 9, 10, 11 | 12, 13, 14 | 15 | 16 | 17 | 18 |
|----------|----|----------|----------|------|-------|-----|-----------|------------|-----|------|-------|--------|
| Function | ON | -IN | +IN | CASE | PGOOD | +RS | +OUT | -OUT | -RS | TRIM | PARAL | NO PIN |

Heatsink

| Part number | Ribs configuration | Dimensions A*B*H*D, mm | Area, cm ² | Weight, g |
|-------------|--------------------|------------------------|-----------------------|-----------|
| 752695.009 | Longitudinal | 168*125*46*6 | 1890 | 1200 |

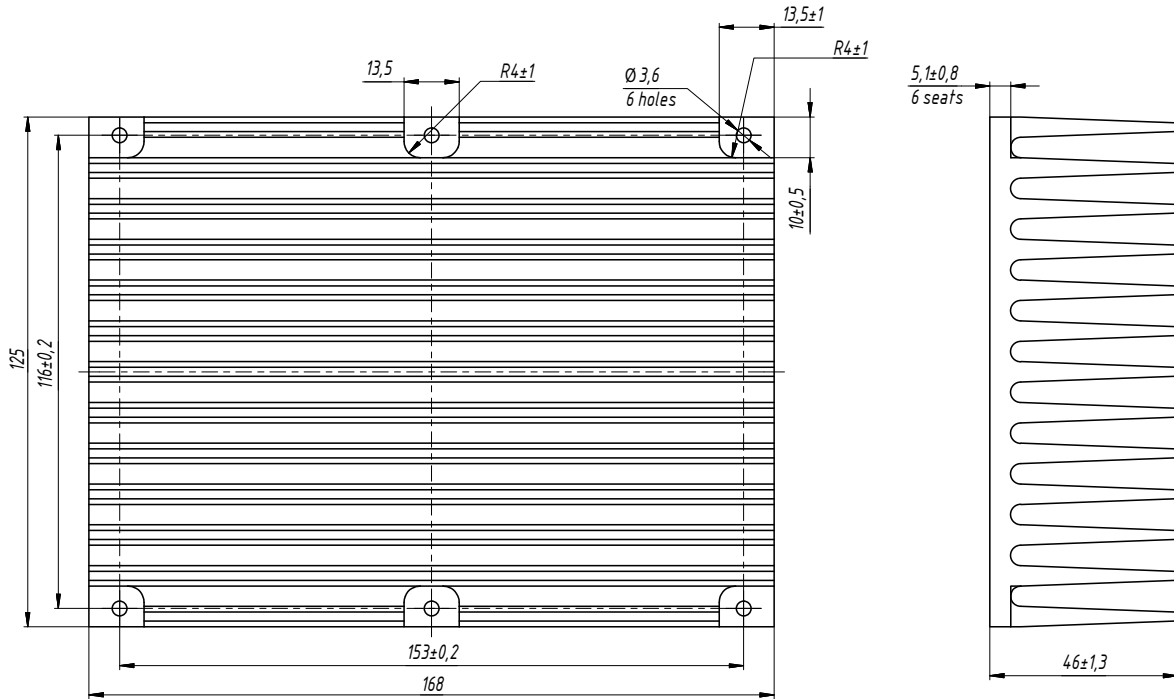


Figure 9. 752695.009.

voltbricks

www.voltbricks.com info@voltbricks.com

VOLTBRICKS PTE. LTD.

105 Cecil street

#15-01 The OCTAGONE

Singapore 069534

+65 6950 0011

Manufacturer of reliable DC/DC converters and power supply systems

This datasheet is valid for the following units: VDV1000-1V24; VDV1000-1V28; VDV1000-1V48; VDV1000-1D24; VDV1000-1D28; VDV1000-1D48.