


VDV Series

VDV400, VDV500

Multi-purpose compact DC/DC converters

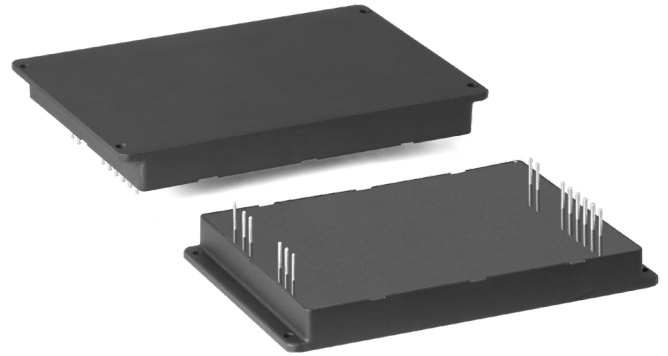

Description

Compact isolated DC/DC converters of VDV Series for industrial and special purpose applications. Despite the small size (122×84,2×12,85 mm) the maximum output power of modules reach up 500 W and they are able to operate in a wide case operating temperature range (–60...+125°C). These modules might have single galvanically isolated output, remote on/off, short circuit, overcurrent and thermal protection and can operate in parallel and series modes. Without optocouplers in the converter's circuit it can safely operate in conditions of ionizing radiation and high temperature. Power supplies have variable protections from different factors: vibration, dirt, moisture fog and salt fog.

These modules undergo special thermal and limit test including burn-in test with extreme on/off modes.

Compliance

- MIL-STD-810G
- MIL-STD-461F (CE102)
- MIL-STD-704E



Description of VDV Series on the manufacturer's website
<https://voltbricks.com/product/vdv>

Features

- 5 year warranty
- Output current up to 30 A
- 28 VDC (index "V") input compliant with MIL-STD-704E
- Low-profile design (12,85 mm) with cylindrical pin outs
- Case operating temperature –60...+125°C
- 125 °C baseplate operation without derating
- Magnetic feedback without optocouplers
- Short circuit protection, overvoltage, thermal protection
- Remote on/off
- Output voltage adjustment
- Typical efficiency 90% (Uout.=24 VDC)
- Polymer potting sealing

Order registration

+65 6950 0011, Global Operations Team

Technical support

support@voltbricks.com


Reliability test

https://support.voltbricks.com/Reliability-Test_ENG.pdf

3D models

<https://support.voltbricks.com/models/VDV500-en.stp>

Ordering information

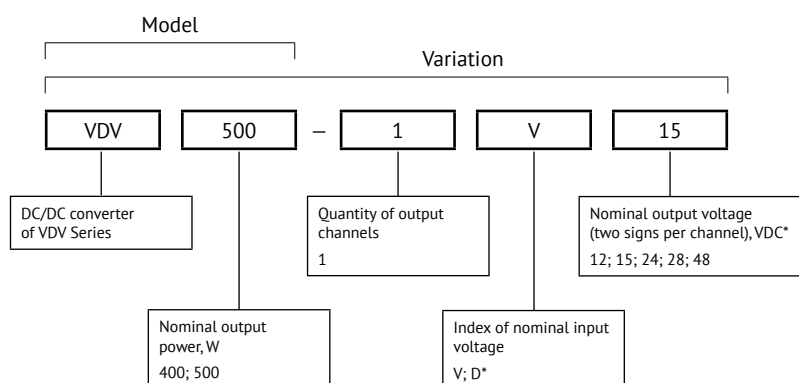

For more information please contact
our Global Operations Team

+65 6950 0011

info@voltbricks.com

* Input voltage range «D» is not supported in: 1) 500W converter; 2) 400W with 12VDC output converter.

Output power and current

Model	VDV400					VDV500			
Output power, W	360	400				450	500		
Output voltage, VDC	12	15	24	28	48	15	24	28	48
Maximal output current, A	30	26,6	16,7	14,2	8,3	30	20,8	17,8	10,4

Other output voltage within range 3...70 VDC is also available upon special request.

Index of nominal input voltage**

Parameter	Index "V"	Index "D"
Nominal input voltage, VDC	28	48
Input voltage range, VDC	17...36	36...75
Transient deviation (1 s), VDC	17...80	36...84
Typical efficiency for Uout.=24 VDC	86%	90%

** Reflected input ripple current (10–10000 Hz) – 8% Uin. nom

Specifications

All specifications valid for normal climatic conditions (ambient temp. 15...35°C; relative humidity 45...80%; air pressure 8,6×10⁴...10,6×10⁴ Pa), U_{in}. nom, I_{out}. nom, unless otherwise stated. It is important to note that the information herein is not full.

Output specifications

Parameter		Value
Output voltage adjustment of single channel models		±5% U _{out} . nom
Regulation	Input voltage variation (U _{min} ...U _{max})	max ±2% U _{out} . nom
	Load variation (10...100% I _{max})	
	Total regulation	±6% U _{out} . nom
Ripple and noise (p-p)		<2% U _{out} . nom
Maximum capacitive load	12 VDC	1000 uF
	24 VDC	150 uF
	48 VDC	70 uF
Start up time (remote)		max 0,1 s
Overload protection level*	400 W	<2,2 P _{max}
	500 W	<1,8 P _{max}
Short circuit protection*		hiccup auto recovery
Overvoltage protection		1,5 U _{nom}

* Parameters are stated for the information purposes and could not be used at long term work, exceeding maximum output current, at work outside of a range of operating temperatures.

General specifications

Parameter		Value
Case temperature	Operating	-60...+125°C
	Storage	-60...+125°C
Switching frequency		140 kHz ±10%
Isolation capacitance	input/output	1500 pF
Isolation voltage (60 s)	input/output, input/case, output/case	500 VAC, 50 Hz
Isolation resistance @ 500 VDC	input/output, input/case, output/case	20 MOhm min, normal climatic conditions
Thermal impedance		3°C/W
Thermal protection		+
Remote on/off		Off.: connection of pins "ON" and "-IN", I _{leak} ≤ 5 mA
Vibration and dust proof, salt fog resistant		+
Moisture proof (T _{amb} =25°C)		98%
Typical MTBF		1 737 900 hrs
Failure rate		<0,05%
Warranty		5 years

Specifications (cont.)

Physical specifications

Parameter	Value
Case material	aluminium
Potting	epoxy polimer
Pin material	phosphor bronze, SnPb plated
Weight	max 290 g
Soldering temperature	260°C @ 5 s

Design topology

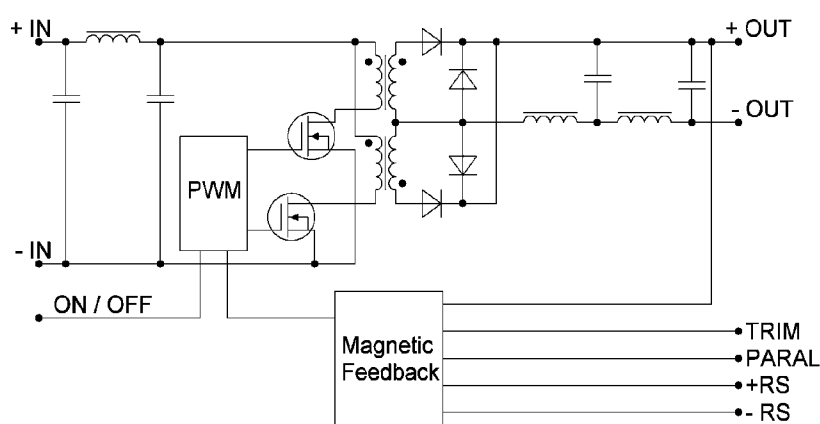


Figure 1. Design topology.

Service functions

Typical connection

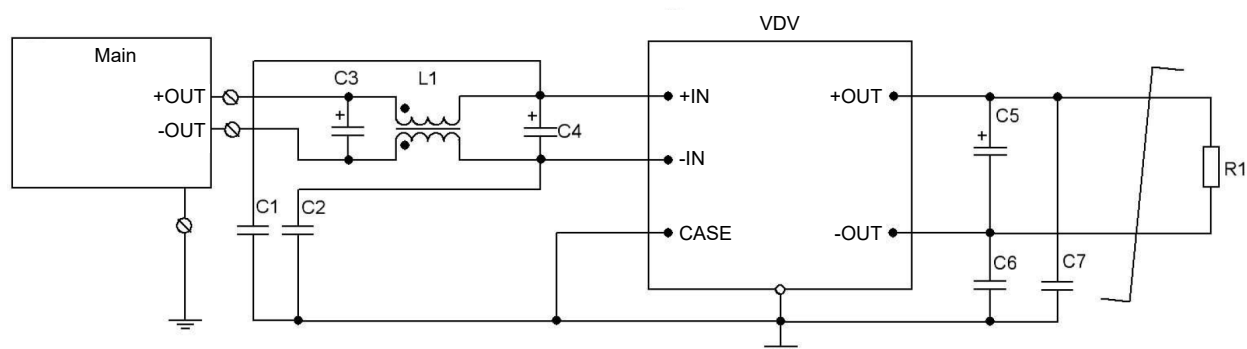


Figure 2 (a). Typical connection for a single-channel module.

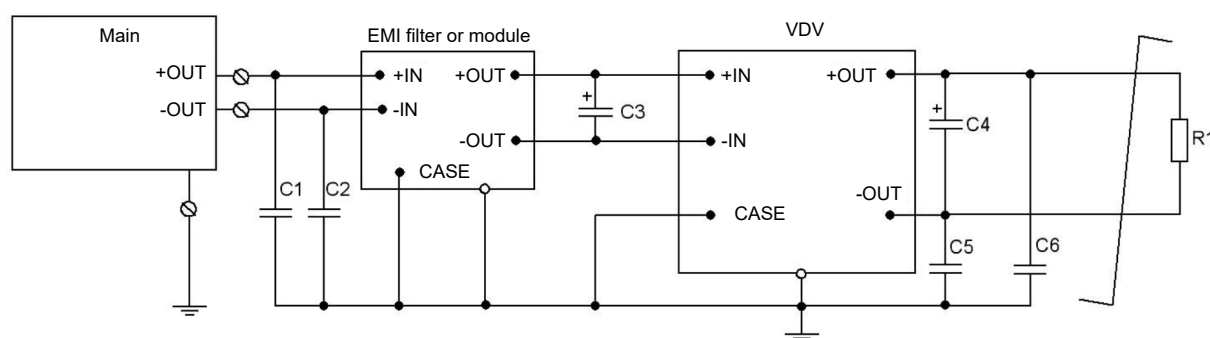


Figure 2 (b). Typical connection with filtration unit.

C1, C2, C6, C7		ceramic capacitor		100...4700 pF 500 VDC min
C4		tantalum capacitor	Input voltage	28 VDC 60 VDC
C5		tantalum capacitor	Output voltage	15 VDC 24 VDC 48 VDC
EMI Filter	L1	common mode choke		0,7 mH
	C3	ceramic capacitor	Input voltage	28 VDC 60 VDC
EMI Module		VFA series	Double Pi filter EMI module. See datasheet VFA Series	
			Maximum current up to 20 A, overvoltage and surge protection, loss insertion up to 60 db	

Service functions (cont.)

Remote control

Function of remote control by a signal allows to control the unit's operation using mechanical relay or electric switch of "open collector" type.

The unit should be powered off by connecting "ON" output to "-IN" output. The switch can carry current of up to 5 mA, the max voltage drop on the switch should be less than 1,1 V.

The unit is powered on by disconnecting the switch within the time less then 5 μ s. Being disconnected the switch is applied by approximately 5 V, allowable current leakage through the switch should not be over 50 μ A.

To arrange remote power off/on of several units simultaneously it is not allowed to use additional elements in the circuit to connect outputs "ON" and "-IN" and a switch.

If the function of remote power off/on is not used, "ON" output is allowed to be left unconnected.

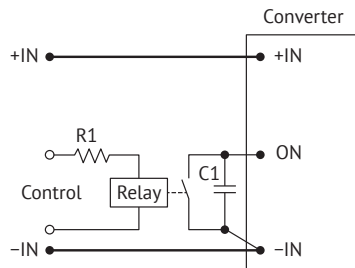


Figure 3 (a). ON/OFF control by relay.

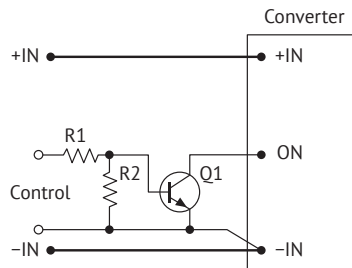


Figure 3 (b). ON/OFF control by bipolar transistor.

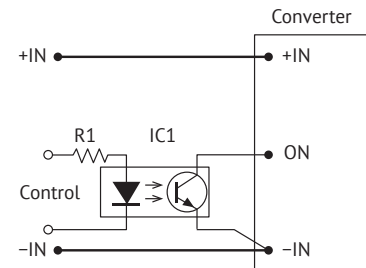


Figure 3 (c). ON/OFF control by optocoupler.

Adjustment

Adjustment of output voltage of a power supply unit within the range of at least $\pm 5\%$ can be done by connecting "ADJ" output (if available) through "-OUT" output to increase output voltage, or through "+OUT" output to decrease the output voltage.

In case of using variable resistor Rvar and outside resistors (R1, R2) it is possible to fulfill the adjustment both to increase and decrease the output voltage.

If you need to control the output voltage of a power supply unit by a signal from external source of current or voltage, e.g. in micro-controller automated control systems using DAC, the external current or voltage signal should be supplied to the adjustment output relating to "-OUT" output, as shown in the drawings (e) and (d).




Figure 4 (a). Output voltage increase.




Figure 4 (b). Output voltage decrease.




Figure 4 (c). Adjustment by resistive divider.




Figure 4 (e). Adjustment by current source.




Figure 4 (d). Adjustment by voltage source.

Service functions (cont.)

Nominal value of adjustment resistors

Номинальное выходное напряжение модуля, В	Сопротивление резистора R _{РЕП} , кОм, для получения выходного напряжения										
	0,95xU _{НОМ}	0,96xU _{НОМ}	0,97xU _{НОМ}	0,98xU _{НОМ}	0,99xU _{НОМ}	U _{НОМ}	1,01xU _{НОМ}	1,02xU _{НОМ}	1,03xU _{НОМ}	1,04xU _{НОМ}	1,05xU _{НОМ}
12	132	171	236	367	759	∞	188	86	53	36	26
15	186	240	329	508	1043	∞	198	91	56	38	28
24	358	457	621	951	1938	∞	214	99	61	42	31
28	418	533	724	1106	2252	∞	217	101	62	43	31
48	823	1044	1412	2149	4360	∞	227	106	66	45	33

External feedback

Application of external feedback allows to compensate for output voltage drop on extended power lines and isolating diodes. The maximum value of compensation for output voltage drop is no less than 5%. If it's necessary to provide better A/I, "+RS" and "-RS" pins should be connected to the load with twisted-pair wire which has cross-section area no less than 0,1 mm².

Typical connection diagram of external feedback application for power supply system with extended power lines is shown in picture:

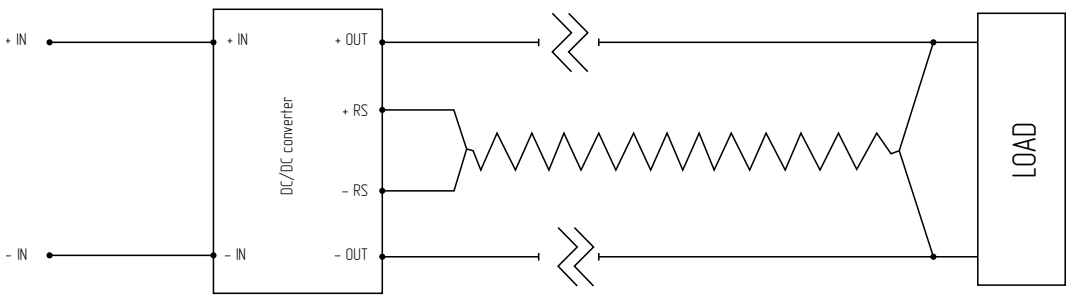


Figure 5. Typical connection diagram of external feedback application.

If there no need to apply external feedback, "+RS" and "-RS" pins should be connected with "+IN" and "-IN" directly according to the picture. It is strictly forbidden to leave "+RS" and "-RS" pins disconnected.

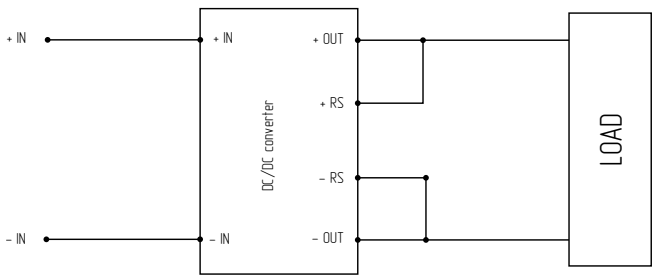


Figure 6. Typical connection diagram without external feedback application.

Efficiency

VS load

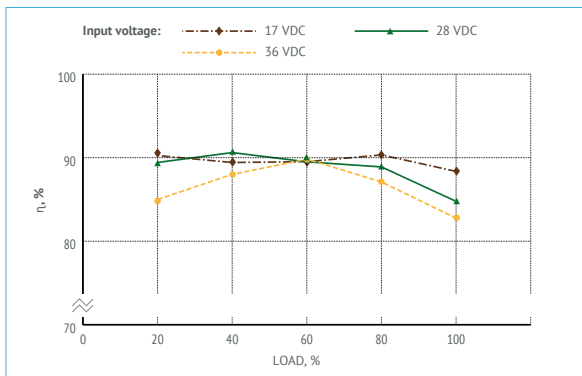


Figure 7. Efficiency of VDV400-1V28.

Oscilloscope charts

Testing conditions $U_{in}=28$ VDC, $I_{out}=15.6$ A, $T_{amb}=25^{\circ}\text{C}$, $U_{out}=32$ VDC, $C_{out}=100$ μF

The database of regulated parameters of the manufactured products is available. Pls. contact your personal manager or customer support service to get necessary information.

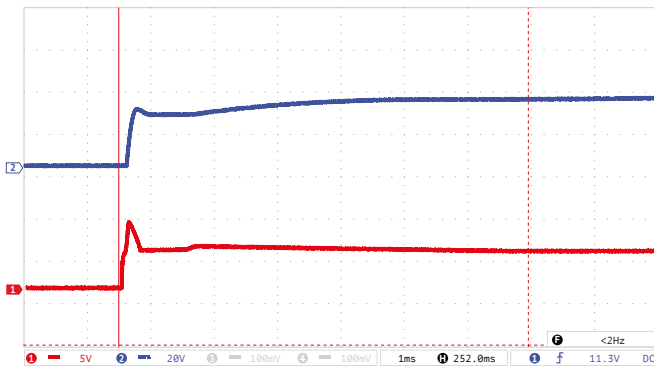


Figure 8 (a). Oscilloscope chart of setting output voltage after supplying remote control signal to ON-output.

Ray 1 (red) – output voltage. Scale 5 V/div.
Ray 2 (blue) – voltage at ON-output. Scale 20 V/div.
Time scale $t=1$ ms/div.

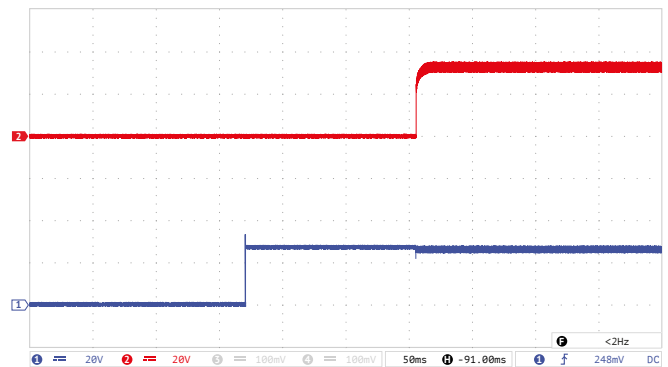


Figure 8 (b). Oscilloscope chart of output voltage after supplying the input voltage.

Ray 1 (blue) – input voltage. Scale 20 V/div.
Ray 2 (red) – output voltage. Scale 20 V/div.
Time scale $t=50$ ms/div.

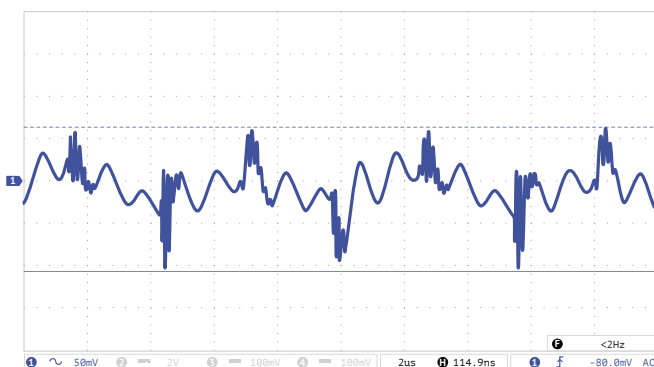


Figure 8 (c). Oscilloscope chart of output voltage ripple.

Ray 1 (blue) – ripple of output voltage. Scale 50 mV/div.
Time scale $t=2$ $\mu\text{s}/\text{div}$.
Measuring technique: see Electrical Test Screen.

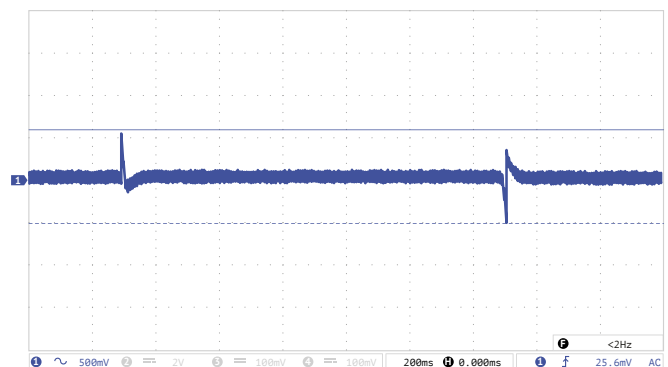


Figure 8 (d). Oscilloscope chart of voltage transient deviation during load "drop/rise".

Ray 1 (blue) – output voltage. Scale 500 mV/div.
Time scale $t=200$ ms/div.

Modes:

- "drop" output current variation (10...100%) I_{nom} ;
- "rise" output current variation (10...100%) I_{nom} ;
- build-up time 500 μs .

Noise spectrogram

Testing according to MIL-STD-461F CE102. (Tcase=25°C, Vin.=+12 V, full load, unless otherwise specified)

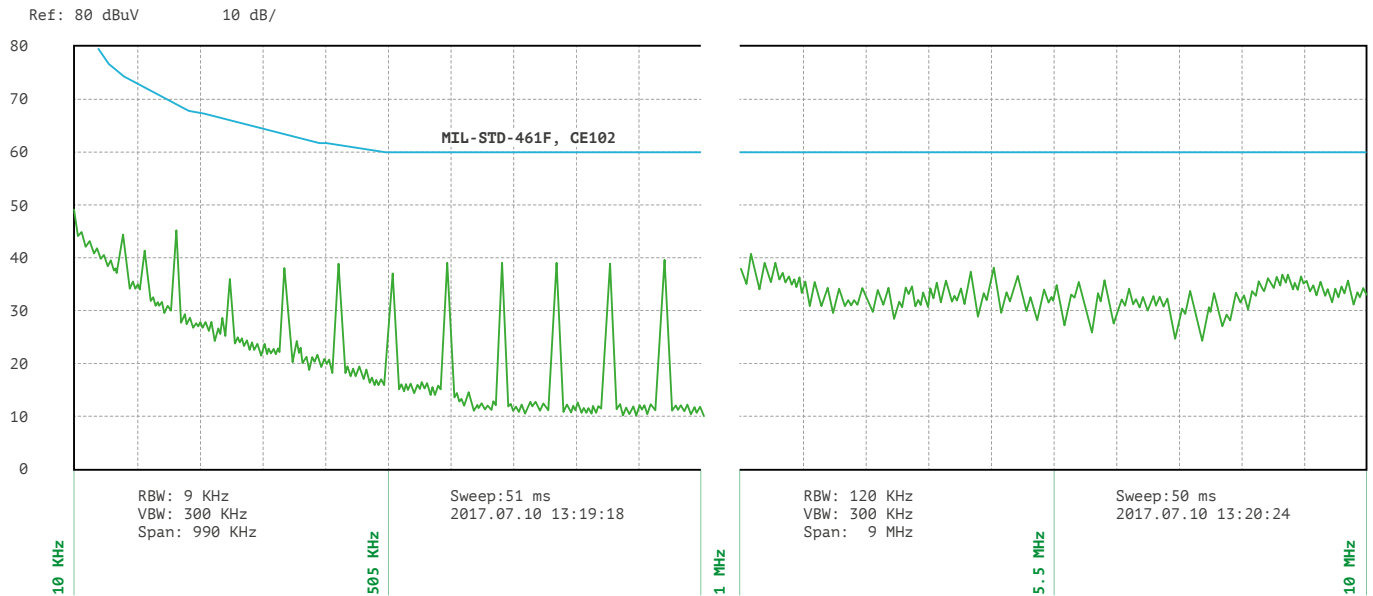


Figure 9. Spectrogram of VDV500-1V28 with typical connection diagram.

Outline dimensions

Models packed in reinforced case with flanges

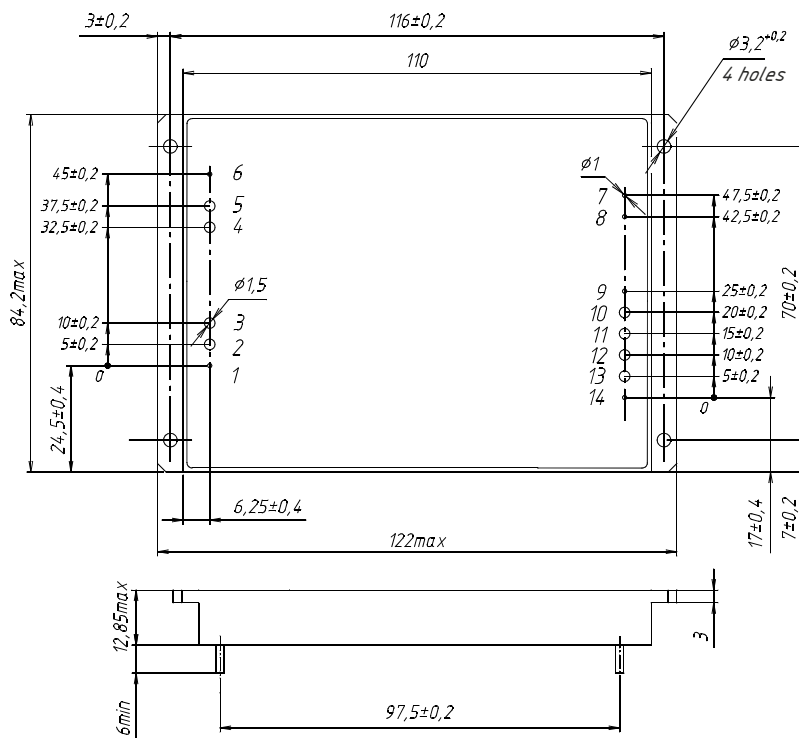


Figure 10. Single-output models.

Pin out

Pin #	1	2, 3	4, 5	6	7	8	9	10, 11	12, 13	14
Function	ON	-IN	+IN	CASE	PARAL	TRIM	-RS	-OUT	+OUT	+RS

Heatsink

Part number	Ribs configuration	Dimensions A×B×H×D, mm	Area, cm ²	Weight, g
752695.008	Longitudinal	122×82×14×4	558	210
752695.008-01	Longitudinal	122×82×24×4	901	317

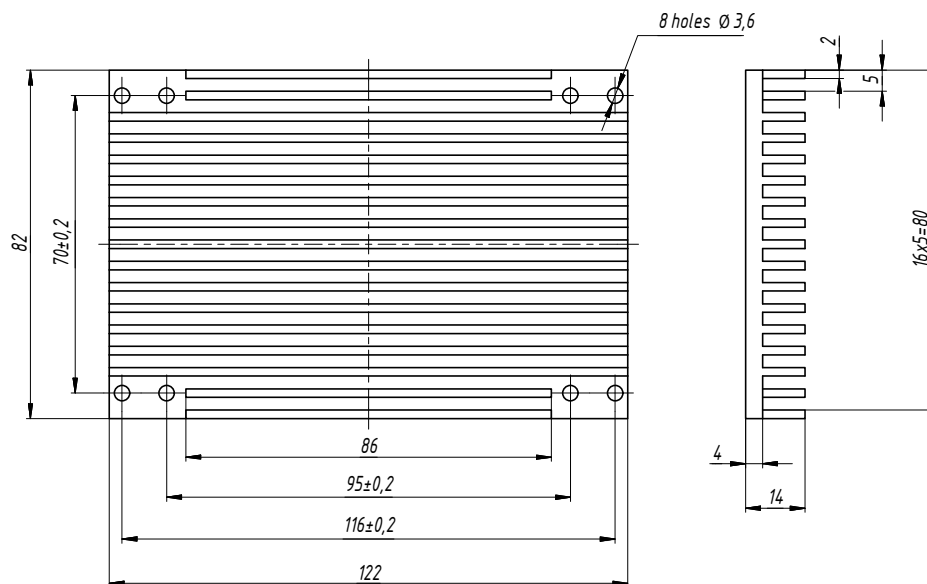


Figure 11 (a).752695.008.

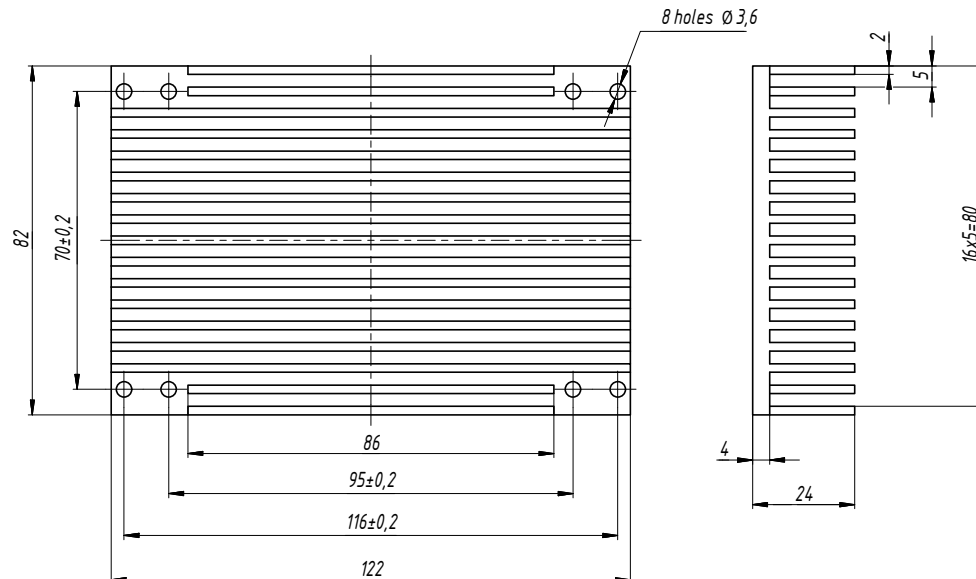


Figure 11 (b).752695.008-01.

voltbricks

www.voltbricks.com info@voltbricks.com

VOLTBRICKS PTE. LTD.

105 Cecil street

#15-01 The OCTAGONE

Singapore 069534

+65 6950 0011

Manufacturer of reliable DC/DC converters and power
supply systems

This datasheet is valid for the following units: VDV400-1V12; VDV400-1V15; VDV400-1V24; VDV400-1V28; VDV400-1V48; VDV400-1D12; VDV400-1D15; VDV400-1D24; VDV400-1D28; VDV400-1D48; VDV500-1V15; VDV500-1V24; VDV500-1V28; VDV500-1V48.